


Twin / Triple Lana Round Cone



Twin / Triple Lana Round Cone 11 watt 1000 lumen

Twin/triple high performance downlights mounted in an oval plate, with the lamps set high, in a deep glare reducing baffle, to enable controlled directional lighting with maximum comfort.

Twin/triple high performance downlights are directionally adjustable through 360° horizontally and 40° vertically. The fitting is supplied prewired to the transformer for ease of installation.



**Emergency**

For information on Flexible Emergency Lighting Remote Power Packs see page 7A4.

**Transformers**

For information on Altima's range of LED drivers and transformers please see page 1N.

**Dimming**

For information on Dimmer Packs see section 9.

**L LED**

Twin

**12.4851L.57** White

with Firehood



**12.4852L.57** White

Triple

**12.4853L.57** White

with Firehood



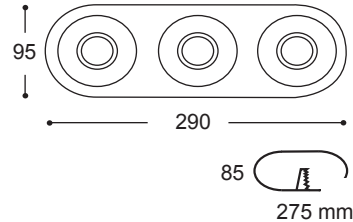


**12.4854 L.57** White




**Technical Data**

Material	Aluminium / die-cast
Cutout	85x177mm / 85x275mm
LED	11w 1000 lumen 3000 Kelvin
CRI	80
Protection	IP23
Approvals	


Dimming	1-10v Dimmable with 81.1015
	Wafer Button Multiway
	Wafer Rotary 1-10v
	DALI
	Trailing Edge

Technical Data			
Material	Aluminium / die-cast	Dimming	1-10v Dimmable with 81.1015
Cutout	85x177mm / 85x275mm		Wafer Button Multiway
LED	11w 1000 lumen 3000 Kelvin		Wafer Rotary 1-10v
CRI	80		DALI
Protection	IP23		Trailing Edge
Approvals	    		

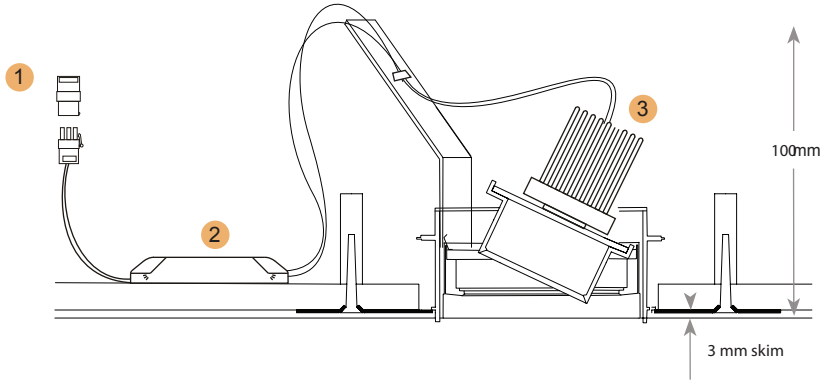

- 1 Primary plug and socket, enabling the socket to be prewired with first fix
- 2 Switched or Dimmable driver
- 3 Firehood option

Light Distribution for Lana Cone

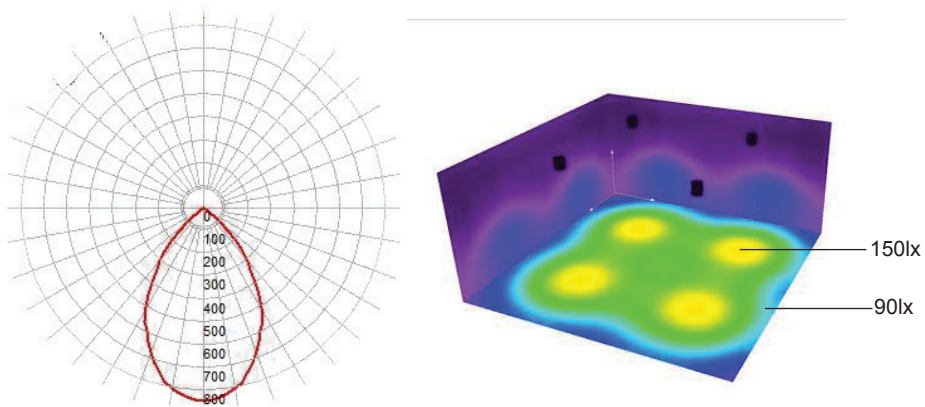

Lana Cone Round shown in a typical room (5x5m) with a ceiling height of 2.4m

**Dimming**

For information on dimming controls, please see section 9 Wafer range for dimming options 1-10v, DALI and Trailing edge.

**Emergency**

Emergency option supplied complete with relevant gear and battery pack.  
 Electronic emergency test switch available, please see page 7C1 for 81.EM02.57  
 For information on Flexible Emergency Lighting Remote Power Packs see page 7A4.