

# Cirkular Standard Tripod



Cirkular Standard

4 x PL-L 36W

A floor standing fitting providing soft local downlight with powerful uplighting and very high efficiency.

Four PL-L 36 watt compact fluorescent lamps are used with high frequency flicker free electronic control gear. This combination gives very good energy efficiency and colour rendering quality.

A dimmable version is available and an emergency lighting option with a power supply to maintain 25% light output for three hours.


16.K210 4 x PL-L 36W

Dimmable

16.K211 4 x PL-L 36W

The dimmer is integrated within the fitting, so simply requires a push switch to operate or a wireless remote control. See our Wafer Switches range in section 11.

All equipped with HF Ballast.

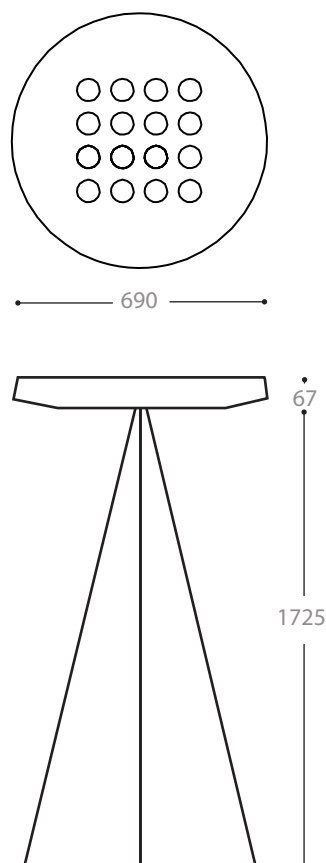

## Technical Data

Finish	_____	_____
Material	_____	_____
Lamp Wattage	_____	_____
Lamp	_____	_____
Control Gear	_____	_____