


# Lana 5 LED Downlight



**L** Lana 5 Fixed LED Downlight 1000 lumen 11w LED

The LED is set high in a deep glare reducing baffle, the fitting is supplied prewired, for ease of installation. High output 11watt LED, 1000 lumen, 3000 kelvin. We can supply 6000 kelvin, cool white available on request.

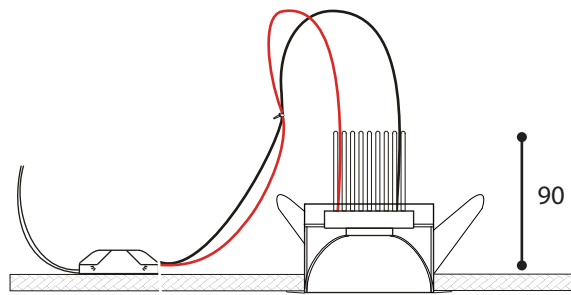


LED		with Firehood	
Switch		Switch	
<b>12.5030L.34</b>	<b>Brushed Nickel</b>	<b>12.5032L.34</b>	<b>Brushed Nickel</b>
<b>12.5030L.57</b>	<b>White</b>	<b>12.5032L.57</b>	<b>White</b>
1-10v Dimmable		1-10v Dimmable	
<b>12.5030LD.34</b>	<b>Brushed Nickel</b>	<b>12.5032LD.34</b>	<b>Brushed Nickel</b>
<b>12.5030LD.57</b>	<b>White</b>	<b>12.5032LD.57</b>	<b>White</b>
DALI Dimmable		DALI Dimmable	
<b>12.5030LDD.34</b>	<b>Brushed Nickel</b>	<b>12.5032LDD.34</b>	<b>Brushed Nickel</b>
<b>12.5030LDD.57</b>	<b>White</b>	<b>12.5032LDD.57</b>	<b>White</b>
Trailing Edge Dimmable		Trailing Edge Dimmable	
<b>12.5030LDT.34</b>	<b>Brushed Nickel</b>	<b>12.5032LDT.34</b>	<b>Brushed Nickel</b>
<b>12.5030LDT.57</b>	<b>White</b>	<b>12.5032LDT.57</b>	<b>White</b>



# Lana 5 LED Downlight

## Lana LED Technical Data

Material	Aluminium	Dimming	1-10v Dimmable with 81.1015
Cutout	63mm		DALI
LED	11w 1000 lumen 3000 Kelvin		Trailing Edge
CRI	80		
Protection	IP23		
Approvals			


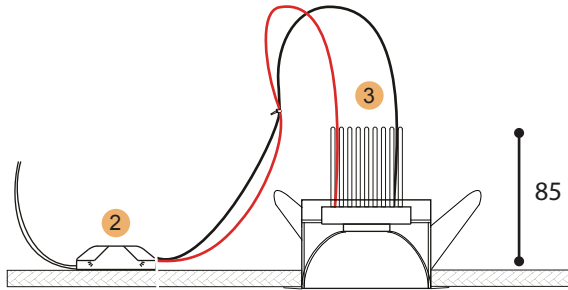


63mm with firehood

- 2 Switched or Dimmable driver
- 3 Firehood option



### Light Distribution for Lana 5

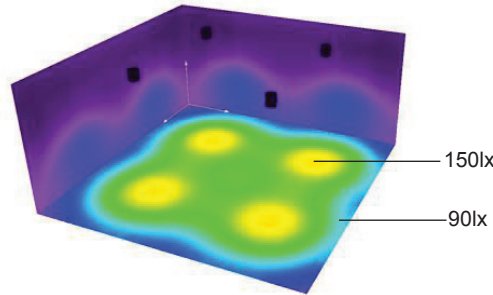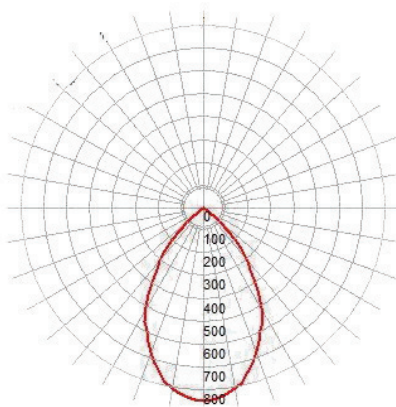

Lana 5 shown in a typical room (5x5m) with a ceiling height of 2.4m

### Dimming

For information on dimming controls, please see section 9 Wafer range for dimming options 1-10v, DALI and Trailing edge.

### Emergency

Emergency option supplied complete with relevant gear and battery pack.  
 Electronic emergency test switch available, please page 7C1 for EM02.57  
 For information on Flexible Emergency Lighting Remote Power Packs see page 7A4.